



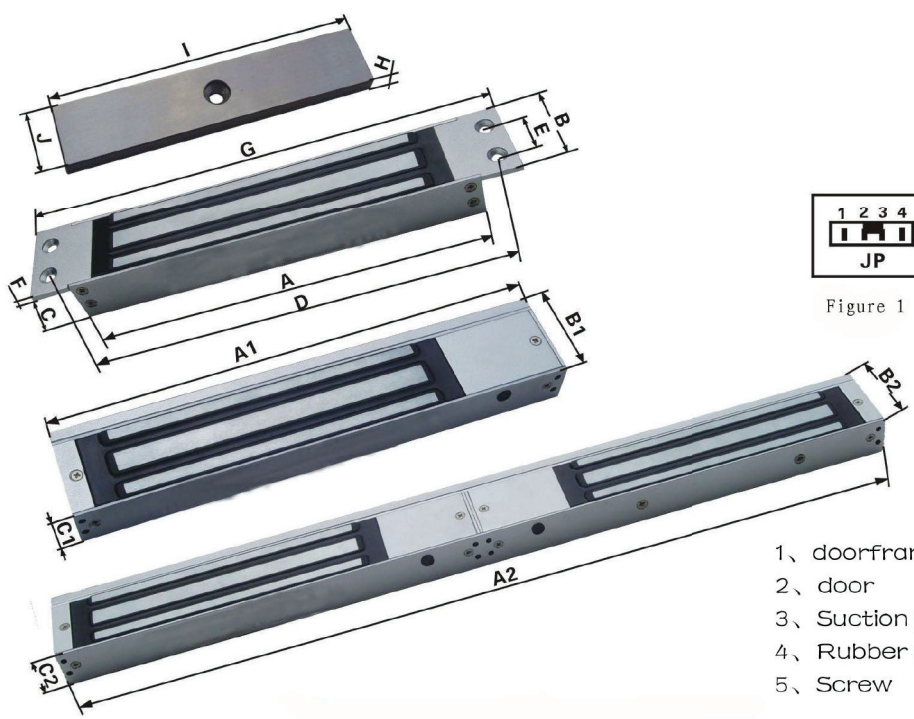

APPLICATION: magnetic locks are widely used in security doors, fire doors and other building intercom systems engineering.

PRODUCT BENEFITS: The company produces magnetic locks are making use of professional magnetic materials and special treatment, long working hours does not produce residual magnetism, not afraid of long-term use after the suction plate is magnetized lead to reduced suction, the product no mechanical failure, no wear, no noise and long service life. Frameless glass doors can choose to install matching support bracket.

OPEN METHOD: 90°.

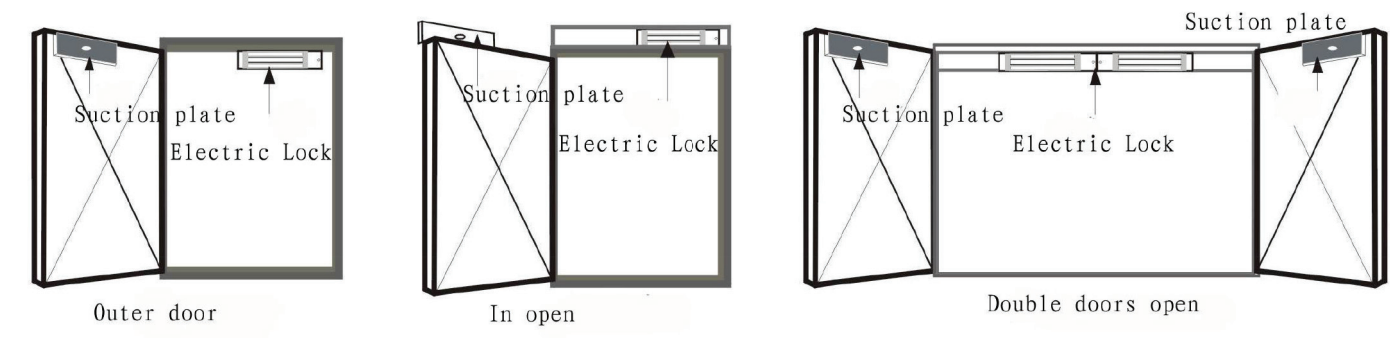

Parameters


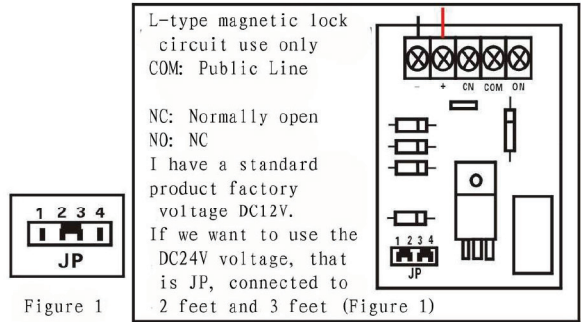


Figure 1

Wiring Diagram

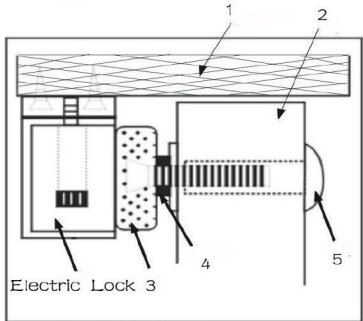

Installation Diagram

| Series Model | | Size (mm) | | | | | | | | | | Performance | | |
|----------------|-------|-----------|----|------|-----|----|-----|-----|----|-----|----|-------------|------------|--------|
| Dark Side | | A | B | C | D | E | F | G | H | I | J | Voltage DC | Current mA | Output |
| | 180kg | 158 | 35 | 17.5 | 182 | 20 | 3.5 | 198 | 11 | 130 | 32 | 12 | 38 | NO |
| | 280kg | 205 | 42 | 21.5 | 228 | 20 | 3.5 | 245 | 12 | 185 | 38 | 12/24 | 500/250 | NO |
| Ming Equipment | | A1 | B1 | C1 | | | | | | | | | | |
| | 180kg | 170 | 40 | 21 | | | | | 11 | 130 | 32 | 12 | 380 | NO |
| | 280kg | 251 | 48 | 25 | | | | | 12 | 185 | 38 | 12/24 | 500/250 | Have |
| Double Door | | A2 | B2 | C2 | | | | | | | | | | |
| | 180kg | 340 | 40 | 21 | | | | | 11 | 130 | 32 | 12 | 760 | NO |
| | 280kg | 502 | 48 | 25 | | | | | 12 | 185 | 38 | 12/24 | 1000/500 | Have |

Whilst every effort has been made to ensure the accuracy of the information supplied. F.H.Brundle cannot be held responsible for any errors or omissions. This product must only be employed for its original intended use. Any other use is wrong and potentially dangerous. Installation must be carried out in full compliance with current regulations. F.H.Brundle cannot be held liable for any damages resulting from wrongful, erroneous or negligent use.