


# LIGHT SYSTEM - FOR GATES UP TO 60KG




**NYLON 2 WHEEL**

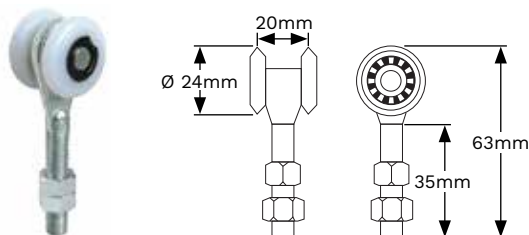


| Thread Ø mm | Max Gate kg | Code          |
|-------------|-------------|---------------|
| M8          | 40          | <b>41L001</b> |

**NYLON 4 WHEEL**

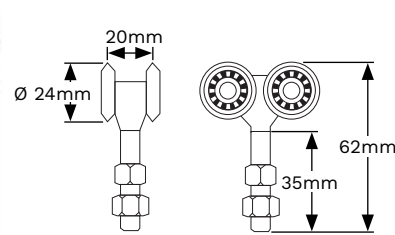


| Thread Ø mm | Max Gate kg | Code          |
|-------------|-------------|---------------|
| M8          | 60          | <b>41L002</b> |

**STEEL 2 WHEEL**

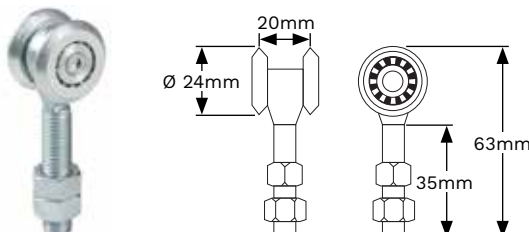


| Thread Ø mm | Max Gate kg | Code          |
|-------------|-------------|---------------|
| M8          | 40          | <b>41L003</b> |

**STEEL 4 WHEEL**

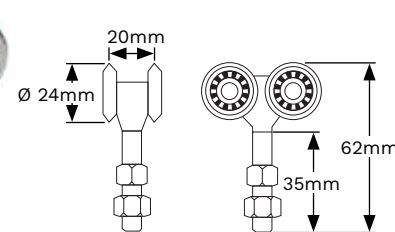


| Thread Ø mm | Max Gate kg | Code          |
|-------------|-------------|---------------|
| M8          | 60          | <b>41L004</b> |

**STEEL 2 WHEEL WITH PLATE**

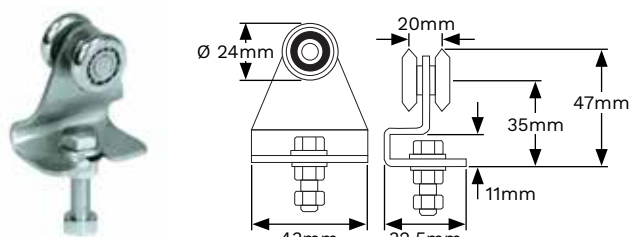


| Thread Ø mm | Max Gate kg | Code          |
|-------------|-------------|---------------|
| M8          | 25          | <b>41L005</b> |

**STEEL 4 WHEEL WITH PLATE**

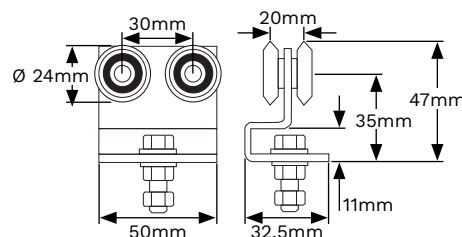

| Thread Ø mm | Max Gate kg | Code          |
|-------------|-------------|---------------|
| M8          | 40          | <b>41L006</b> |

**FIXING PLATE**




| Code          |
|---------------|
| <b>41L007</b> |

**TRACK**



| Length m | Code           |
|----------|----------------|
| 3        | <b>41LT001</b> |

**TRACK STOP**

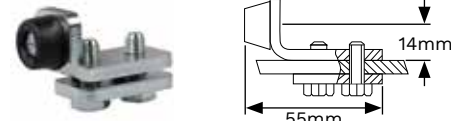


| Code           |
|----------------|
| <b>41LT002</b> |

To suit codes: **41L003, 41L004, 41L005 & 41L006.**


Thickness 2mm.

**CEILING SUPPORT**

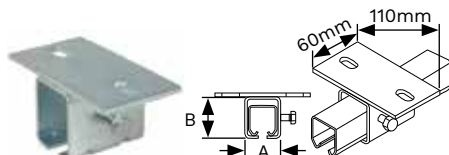


| (A) mm | (B) mm | Code           |
|--------|--------|----------------|
| 41     | 48     | <b>41LT003</b> |

**WALL SUPPORT**

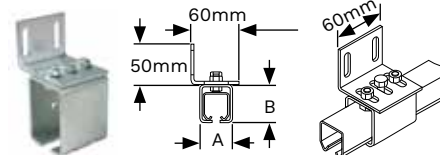

| (A) mm | (B) mm | Code           |
|--------|--------|----------------|
| 41     | 48     | <b>41LT004</b> |

**TRACK CONNECTOR**

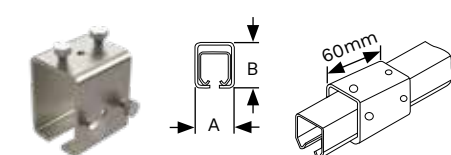

| (A) mm | (B) mm | Code           |
|--------|--------|----------------|
| 41     | 48     | <b>41LT005</b> |

Whilst every effort has been made to ensure the accuracy of the information supplied. F.H. Brundle cannot be held responsible for any errors or omissions. This product must only be employed for its original intended use. Any other use is wrong and potentially dangerous. Installation must be carried out in full compliance with current regulations. F.H. Brundle cannot be held liable for any damages resulting from wrongful, erroneous or negligent use.



**F.H.BRUNDL**  
SERVING THE TRADE SINCE 1889

Tel. 01708 25 35 45

sales@brundle.com

www.fhbrundle.co.uk

Mar 2021