



F.H. BRUNDLE
SERVING THE TRADE SINCE 1889

2023 NEW PRODUCTS

OVER
40 PAGES
OF NEW
PRODUCTS!



ALL FROM STOCK FOR IMMEDIATE DELIVERY

Wrought Iron Components

Rinato™ Gate Infill Boards (p.60)



The look of wood without the hassle!

-  Virtually maintenance free
-  Easy to install
-  Flammability tested
-  Rot free
-  Made from recycled material
-  UV resistance
-  Anti-slip resistance tested
-  Splinter free

Fully tested for sound absorption.

Double-sided boards.

Polymer Wrapped Range – This premium polymer board is wrapped in a decorative wood effect laminate wrap. Available in 3 colours. They provide a stunning high quality solution for fences that need to look good.

Golden Oak



Anthracite



Rustic Oak



For posts & fixings visit our website.

Polymer Embossed Range – This new range of boards, which comes in 4 colours is more cost effective than the Wrapped Range. It has a realistic heat embossed woodgrain finish. This board is ideal for long runs of fencing that aren't in such a prominent location.

Black



Grey



Brown



Green



WPC Range - looks amazing and is both easy to use and cost effective. Available in 4 colours these double-sided boards are smooth on one side and have a realistic woodgrain effect on the other.

Birch



Chestnut



Ebony



Twilight Grey





- Brass bearings
- Low friction, ideal for use with automated gates
- One pair of hinges will support gates from 300kg (150kg per hinge) to 800kg (400kg per hinge)

Corner Mount Superhinge (p.212)



Plan View

Locks & Keeps (p.244)

Quick Exit Gate Lock

No access



- Right or left hand opening
- To suit flat bar & up to 30mm box section or 40 - 60mm box section

Keep With Interlocking Tab

To suit all Superlocks



Gapless Keep

To suit all Superlocks



For our full range of Superlocks see page 244.

Drop Bolt (p.237)

- Surface fix
- Stainless steel drop bolt
- For left & right hand gates



For a full range of Gate Hardware visit www.fhbrundle.co.uk



Mortice Locks (p.255)

With 40mm Dual Cover



- Fits 40mm box section
- Backset 20mm

With 40mm Full Cover



- Ornamental style
- Fully stainless keep

Lock & keep boxes available on page 255.

Gate Hardware

LOCINOX®

U Safe Gate Stainless Steel Safety Cable (p.217)



- For gates up to 500kg
- 300mm cable length, Ø 5mm wire

B Safe Gate Stainless Steel Safety Cable (p.217)



- For gates up to 500kg
- 220mm cable length, Ø 4mm wire

Locinox Serval 180° Spring Hinge (p.225)



- Max gate weight per pair 60kg
- For square profiles


Locinox Serval 180° Spring Hinge (p.225)



- Max gate weight per pair 60kg
- For round profiles

Locinox Nostep Anti Climb Device (p.225)

For use with Serval hinges

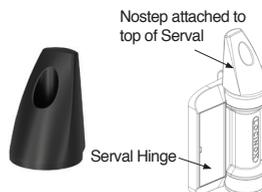

- Fibreglass reinforced PA
- Install on top of Serval Hinge

Locinox Guardima Magna Latch Lockable (p.225)



- 30mm horizontal & vertical adjustment

Locinox Compact 2-Way 90° Hinge (p.228)



- Max gate width 2.5m
- Max gate weight 120kg
- For use with 50 x 50mm gate frame
- Can be used with Interio

Locinox Electradrop (p.238)



- Vandal proof
- Motorised electrical 24v drop bolt
- Fitted with relay for drop bolt detection
- Obstacle detection with automatic stop
- For gate profiles of 40mm or more
- Throw: 115mm

For Interio invisible built in gate closer use code: 05GC20



Locinox Valentino (p.245)

Surface mounted battery powered code lock



- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Extremely strong and vandal proof design
- Operates on 6 Lithium-metal AA batteries (included)
- Easy and fast set-up or modification of the access codes
- Low battery warning light
- Support for free-exit, pushbar, and code controlled handles
- Key-operated unlocking & programming functionality

Swing Gate Locks, Keeps & Insert Keeps (p.254)

Sixty Lock Kit



EXCLUSIVE TO F.H. BRUNDLE

- Lock with stainless steel insert keep
- Aluminium cover shield & handles

Forty, Fifty & Sixty Lock & Keep Box



- To suit 40, 50 & 60mm profile
- 2m in length

Adjustable Insert Keep For Forty, Fifty & Sixty lock



- To suit 40, 50 & 60mm profile
- Aluminium stop plate

Borg Combination Locks (p.246)

One Sided Combination Lock

Push/pull pad on other side



Two Sided Combination Lock



Specification for both locks:

- Marine grade quality keypads tested to 1000 hours salt spray
- On gate code change
- Suitable for 40 - 60mm gate profiles
- Reversible on site
- Over 1000+ combinations
- Concealed code change shield

Gate Hardware

Swing Gate Accessories

Aluminium Self-Closing Hinge (p.225)



- Max gate weight per pair 20kg
- Wall or post mounted

Regular Hinge (p.225)



- For metal gates

Magna-Latch Top Pull Lockable (p.225)



- 6 pin lock

Plain Pivoting Hinge (p.225)




- For metal gates

Swivel Wheel with expander & brake (p.239)



Expands to grip the inside of the tube



Tube available online.

50mm: Dynamic load capacity 40kg, static load capacity 80kg. 75mm: Dynamic load capacity 75kg, static load capacity 150kg. Available in black or silver to suit tube sizes Ø 26.9, 33.7, 42.4 & 48.3mm

Zinc Plated Steel Padlock (p.234)



- Supplied with 3 keys
- Suitable for Fortitude double leaf gates

Bi-Fold Gates Hinge Kit & Drop Bar Set (p.275)



- Double hinged kits to reduce the swinging arc of each gate leaf
- For gate openings with limited space
- Suitable for driveways with a steep incline or on a hill with slope up to the property

Bi-Fold HD Gate Kits (p.277)



- Suitable for heavy duty gates up to 400kg
- Quick & easy to install
- Max opening single leaf 8m & double leaf 16m
- For use with arm or underground automation

Activation Accessories (p.305)

TTS

Premium rolling & fixed code transmitter



- Rolling or fixed code
- 2 or 4 channel option

For a full range of activation & safety accessories see page 305.

A full range of audio visual systems from page 314.



DLX Safety Photocells (p.307)

Synchronised Infrared Photocells



- Flush or surface mounted
- 30m range
- 12 - 24 VAC/DC

Synchronised Infrared BUS Photocells



- Flush or surface mounted
- 30m range

Mesh

The largest range of Mesh from stock just got bigger!

Welded Wire Mesh

Pre-Galvanised Sheets (p.326)



PPC Black Sheets (p.329)



Specification for Pre-Galv & PPC Black:

- Mesh size: 25 x 25 x 3mm. Panel size: 2400 x 1250mm
- Mesh size: 50 x 50 x 3mm. Panel size: 2400 x 1250mm

Cable Ties (p.330)



- Stainless steel Grade 316
- Size: 300 x 4.6mm
- Suitable for mesh panels



Decking & Subframe

Synergised™ Porcelain Tiles (p.379)




- Italian porcelain from one of Italy's top design houses
- Stunningly realistic natural wood effect
- Non-combustible
- Low maintenance & easy to install
- Low surface temperature
- Anti-slip
- UV resistant
- Two collections with a choice of 5 colours in each
- 100% recyclable
- Can be installed directly onto a flat concrete base

Ca' Foscari Collection


Yosemite Collection

Avana Canapa Lino Moro Tobacco Mulberry Olive Shell Tan Walnut

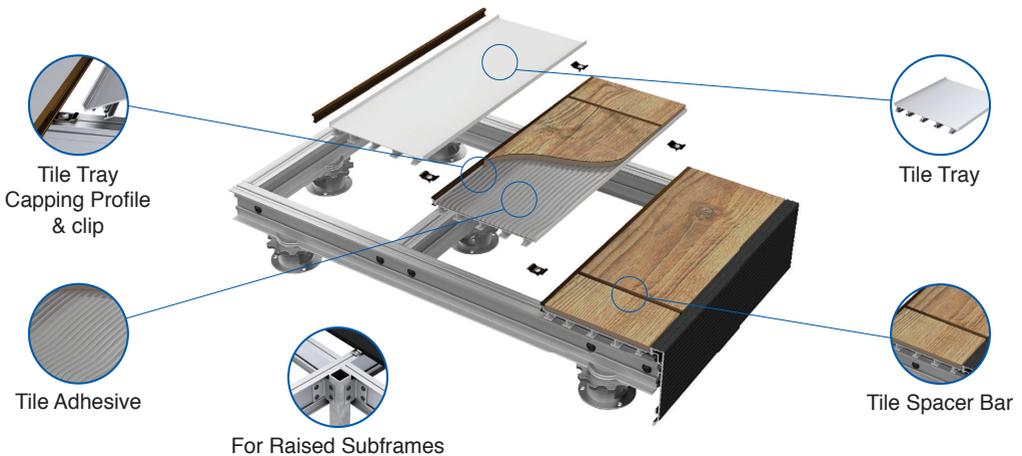

For more information visit www.fhbrundle.co.uk

Synergised™ Connected Aluminium Deck Boards (p.377)

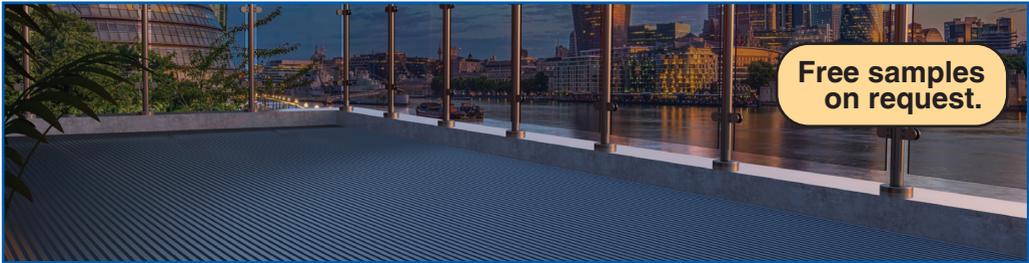

- Cost effective & easy to install
- Non-combustible
- No gaps between boards
- Integrated drainage channels

- Non-slip design
- Powder coated to anthracite RAL 7016
- 10 year warranty on powder coating
- Compatible with Synergised subframe and cradles

Starter Trim



Deck Board



Edging Trim



How To Install Your Deck:



Screw down the starter trim.



Connect your first board.



Screw down the deck board.



Connect next board and repeat..



Screw down final board and mitre edging trim.

The end result is a fully connected Synergised decking system with integrated drainage channels.

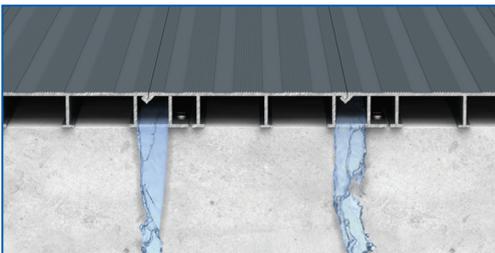


Image shows how water is drained from the deck.



Your fully connected board is ready for use.






Can be used as a tile tray or base for Synergised Porcelain Tiles & Perimeter Base System.

Decking & Subframe

Synergised™ Perimeter Base System (p.382)

Our unique innovative Perimeter Base Section, bolts directly to the Synergised subframe. It allows for a wide range of our base fix handrailing solutions to be bolted down to the perimeter, to provide a safe, stunning edge protection where there is a fall of more than 600mm. The Internal Perimeter Support Jack provides the strength required to allow handrailing systems to reach the desired residential 0.74kN loading requirements, as per BS6180.

If handrailing is not required, then our Edge Fascia Profile can be fitted to discreetly hide the subframe. The edge fascia profile is supplied powder coated black, to contrast stylishly with the range of porcelain tiles and handrailing solutions, it also perfectly matches the perimeter base section when used alongside on the same project.

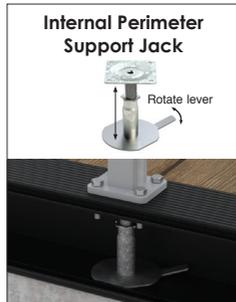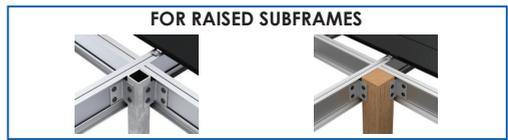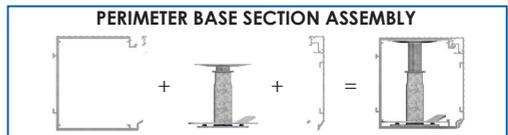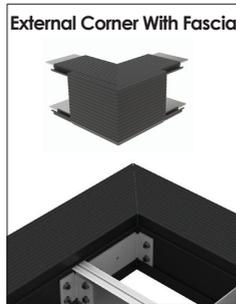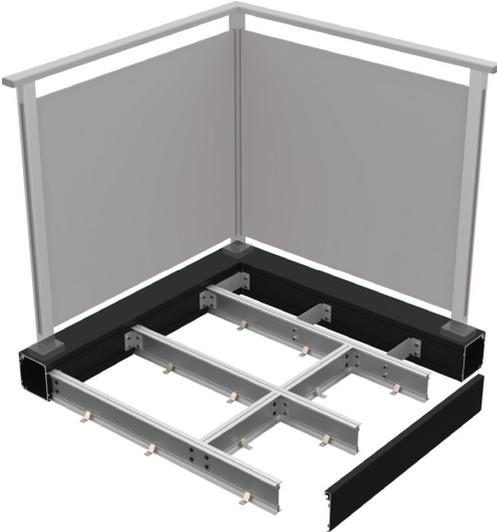

Polymer Profiles (p.372)

Black Plastic Sub Frame



Brown Plastic Sub Frame



- Weather resistant
- Long lasting
- Low maintenance

Synergised Paving Clips (p.376)

To suit 2cm thick tiles

Paving End Stop



Paving Plate



For use with Synergised aluminium substructure.

Synergised™ Adjustable Pedestals (p.371)

50 - 75mm

75 - 115mm

110 - 185mm

185 - 260mm

250 - 325mm



Pedestals are made from zinc passivated steel.

For use with a wide range of decking materials.

Stair Tread Nosing/Deck Trims (p.383)

Black Sand (non-slip)

RAL 9005



Signal Yellow (non-slip)

RAL 1003



Mill Finish

RAL 7022



- Supplied in 3m lengths & 40 x 40 x 1.5mm profile
- The decking trims will not crack, split, warp or fade

View our full range of mill finish joists and cradles online.

Flooring & Stair Treads

Aluminium Nosing (p. 397)



- Anti-slip
- Signal yellow RAL 1003
- Length 3m
- Size: 40 x 40 x 1.5mm



For use as nosing for stair treads.

Handrailing

Aluminium Tube (p.426)



- Aluminium with a superior smooth surface
- Powder coated & anodised finish
- Mill finish available for a colour of your choice
- Lightweight and easy to handle
- 42.4mm diameter, C tube
- Ideal for use with Tube Clamp fittings
- 3mm wall thickness
- 6m lengths

Grey
RAL 7012



Blue
RAL 5010



Oak Wood Effect



Anodised



Mill Finish




Samples available on request.

Aluminium tube is ideal for use with our tube clamp fittings.




Pole Holders (p.436)

Single Position

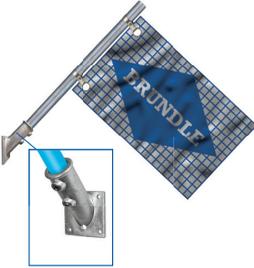

- Angled to 45°
- To suit Ø 33.7mm tube
- Cast malleable iron
- Galvanised

Two Position

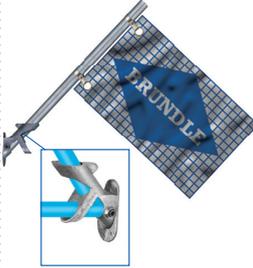

- Angled to 90 or 45°
- To suit Ø 33.7mm tube
- Cast malleable iron
- Galvanised

Sign Holders (p.436)

Single




- For fixing single & double sided signs to tube
- To suit Ø 48.3mm tube
- Suitable for maximum 5mm sign thickness
- Aluminium

Double



Swivel Wheel With Expander & Brake (p.436)

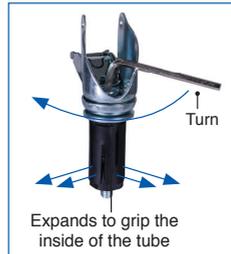

50mm: Dynamic load capacity 40kg, static load capacity 80kg. 75mm: Dynamic load capacity 75kg, static load capacity 150kg. Available in black or silver to suit tube sizes Ø 26.9, 33.7, 42.4 & 48.3mm

Full range of tube available online.


Square Tube Clamp Fittings (p.439)

- Galvanised 40mm square hollow tube – 2.5mm wall thickness to EN 10219 parts 1 and 2 2006 Grade S235JRH
- Fittings are black malleable iron with a hot dip galvanised finish. Clamps supplied with fitted grub screws



Handrailing

Square GRP Post System (p.445)

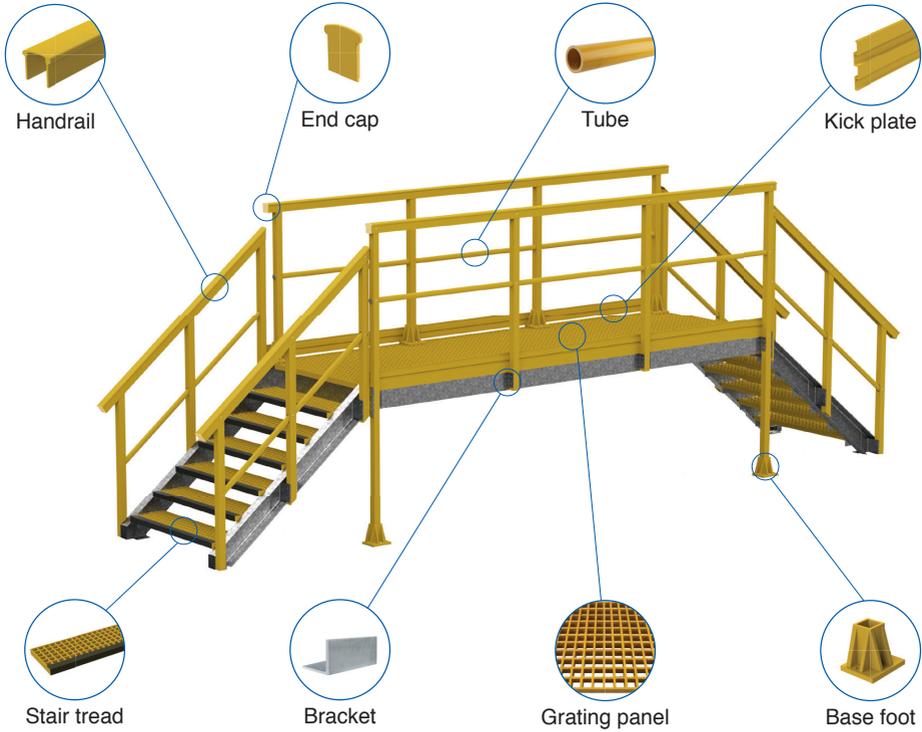

Pre-Drilled Posts

Bolt-Down



- Height 1100mm


Side-Fix/Concrete-In



- Height 1450mm

Handrail & End Cap

'U' Handrail



- Size 67 x 73mm
- Length 6m

Tube

For use as midrail



- Ø 38mm
- Length 6m

End Cap



- For use with 'U' handrail

Hollow Box Section



- 51 x 51mm
- Length 6m

For more information visit www.fhbrundle.co.uk



Design and configure your **bespoke glass balustrade** system in minutes

We supply quality, bespoke glass balustrade systems for balconies and stairs, indoor and outdoor mezzanines, gardens, patios and pool areas, and raised walkways.

1. Select the balustrade design best suited to your project and head to our configurator to start customising!
2. With complete freedom over every element, including metal types and finishing touches, our glass balustrades can be configured to your custom specifications, ready for seamless installation into any space.
3. Leave our software to crunch the numbers, and we'll email you a detailed quote pack within minutes, including free 3D models and technical drawings, a parts list and a quote - everything you need to get started!



The perfect tool for everyone.
Start designing and receive your free CAD drawings at

liveconfigurator.co.uk



liveconfigurator™
BALUSTRADES

The UK's largest stockist of
components for immediate delivery

Handrailing

Glass Stand-Off Adaptors (p.461)

Adjustable Hollow

Flat front



- PPC black
- Ø 30, 40 & 50mm
- To suit 8 - 25.5mm glass
- Slotted countersunk hole

Tilt Adjustable Hollow

Flat front with 2° tilt adjustment



- Satin finish
- Ø 38mm
- To suit 10 - 21.5mm glass
- Slotted countersunk hole



The arc design in the adjuster body provides angle adjustment in any direction, adapt to glass at any angle or uneven wall.

Glass Spigots (p.463)

Round Spigot & Cover Cap



- PPC black
- No holes in glass needed
- To suit 12 - 25mm glass

Square Spigot & Cover Cap



- Satin finish
- No holes in glass needed
- To suit 12 glass


Tilt-Loc Spigot (p.464)

Side-Fix Adjustable Tilt




- Satin finish
- To suit 10 - 17.52mm glass

Spig-lite Pro (p.465)

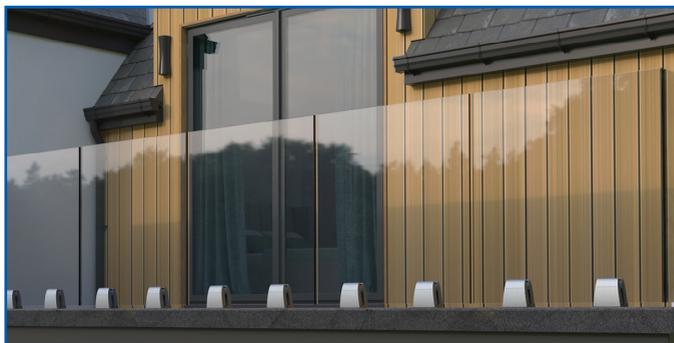

Kit includes: 2 x glass spigots, 2 x glass clamps, 4 x top clips, 4 x gasket sections and 1 x spanner.


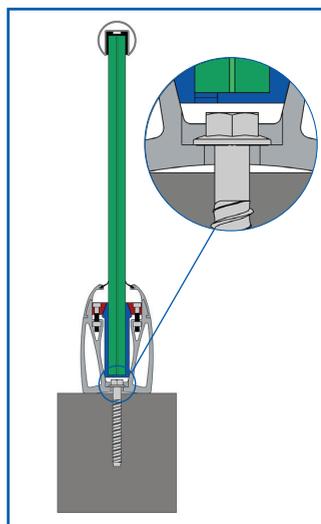


Suitable for fixing to various substrates including concrete & steel.

Wedge-Loc Channel Systems



Duo (p.476)

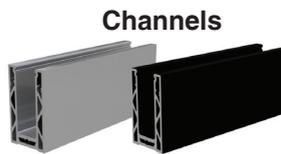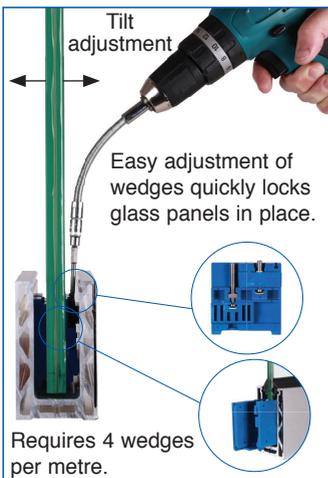

Channels

Internal 90° Corner



External 90° Corner



- Adjustable grips to allow quick alignment of glass
- A fast & cost effective frameless glass solution
- Available in satin anodised, PPC black & mill finish
- For installations up to 1.5kN in commercial applications
- +/-1° adjustment on glass

Requires 4 wedges per metre.

Base and side-fix options available. Internal and external corners simplify the installation process.

F Channel (p.475)



- For installations under screed or decking subframes
- F profile allows flush fitting to the edge of your substrate
- Available in satin anodised finish

- A fast & cost effective frameless glass solution
- Available in satin anodised finish
- No cladding required

- For installations up to 0.74kN in commercial applications
- Doesn't require counter-sunk anchors for fixing

Handrailing

Aluminium Top Rail System (p.496)

Top Rail



- PPC black RAL 9005
- To suit 8 - 21.5mm glass with rubber gasket

90° Top Rail



- Reduced visual impact of top rail
- Connectors simply slide into the top rail for a neat joint

End Cap



Aluminium Top Rail Systems (p.502)

Round



Square



Rectangular



End Caps & Wall Flanges

Round



Square



Rectangular



- Satin anodised & PPC black RAL 9005
- To suit 8 - 21.5mm glass with rubber gasket
- Reduced visual impact of top rail
- Connectors simply slide into the top rail for a neat joint

Pro-Railing Protect (p.519)



The future of stainless steel & glass protection.

- Protect your glass & metal surfaces from weathering, corrosion & climatic degradation
- Easy to apply system using our convenient wipes or larger kits – instruction videos available online
- 100% invisible, anti-abrasion, anti-bacterial & superphobic
- Single application can last up to 2 years

Wipe



- Coverage 2m²

Refresher Kit



- Coverage 10m²

Standard Kit




- Coverage 10m²

Trade Refresher Kit



- Coverage 200m²

Sleeve Fit Adjustable Angle Bracket (p.525)

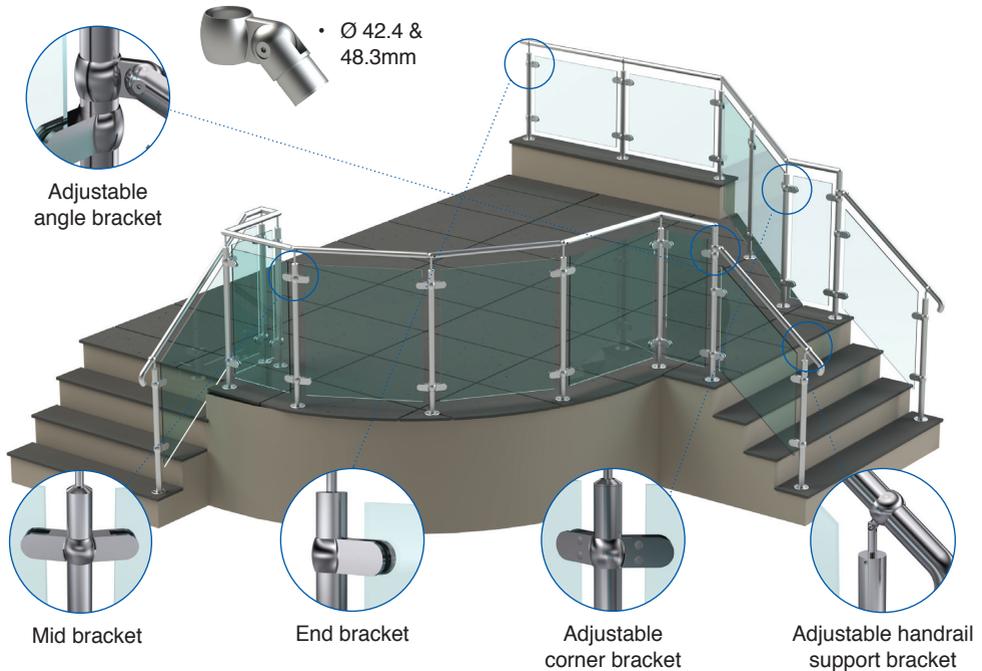

Wire Rope Swageless Internal Threaded Terminals (p.529)

Quick & easy to install. No expensive tools required.

With Screw For Metal Posts

To suit Ø 3 & 6mm wire




With Screw For Wooden Posts

To suit Ø 3 & 6mm wire



Maximum angle for 24° stairs with a Ø 3mm wire & 34° stairs when using a Ø 3mm wire.

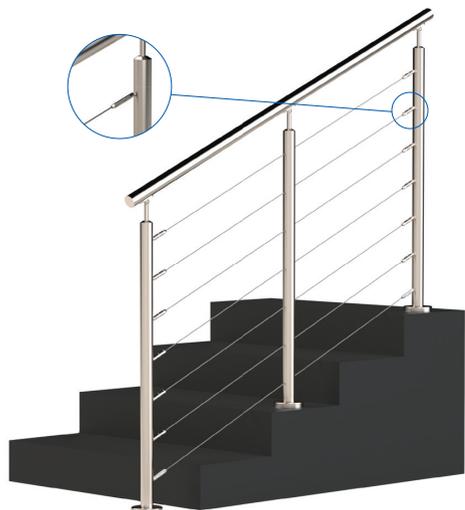

Handrailing

Glass Clamp Angle Adaptors (p.544)



- Allows for angles +/- 85 degrees
- Minimum radius achievable is 1.5m
- No specialist drilling needed. Mid post can be used to change the angle of a straight run with the addition of the angles

Tube Fix



Flat Fix




Exploded View



Using our standard mid or end posts and adding 2 of these angle adaptors to each side of the post, you can create a post that can be adjusted to the required angle at the point of installation.

Convert Standard Post To An Adjustable Post

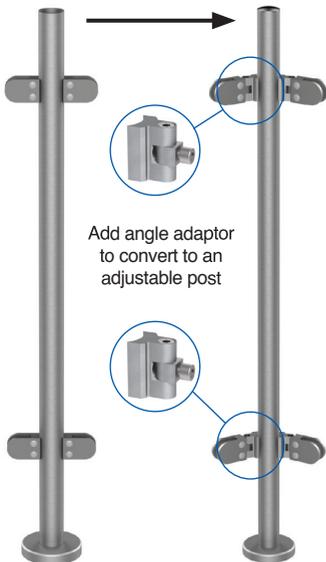

Plan View

Showing adaptors in use with no handrail and Contemplation Posts

Mid Post

Used with a 215 end cap



End Post

Used with a 215 end cap



Plan View

Showing adaptors in use with handrail and Timeless Posts

Mid Post

Used with a 317 adjustable elbow



End Post

Used with a 314 adjustable sleeve




Black Rubber Gasket (p.546)



- Make your own glass clamp rubbers
- Self adhesive backing
- Cut to size

Face Fix Glass Clamps For Square Posts (p.548)

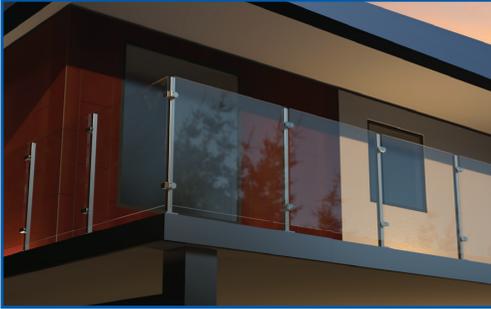

- Suitable for 8 - 12mm glass
- Satin finish, Duplex 2205
- To suit minimum 40mm box section

Plan View Using Box Section



See page 14.

180° Mid



90° End



90° Corner External




90° Corner Internal



Image shows a 180° mid clamp attached to a square post.

For Flat Posts (p.549)

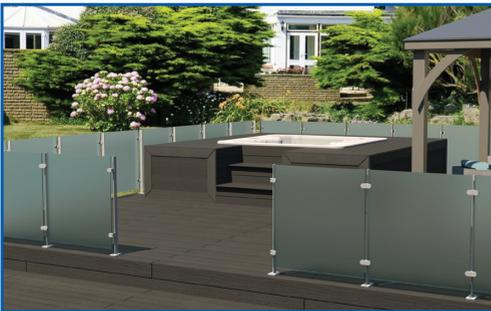

- Suitable for 8 - 12mm glass
- Satin finish, Duplex 2205
- To suit 10 - 12mm flat bar

Plan View Using Flat Bar



See page 12.

180° Mid



90° End



90° Corner External



90° Corner Internal

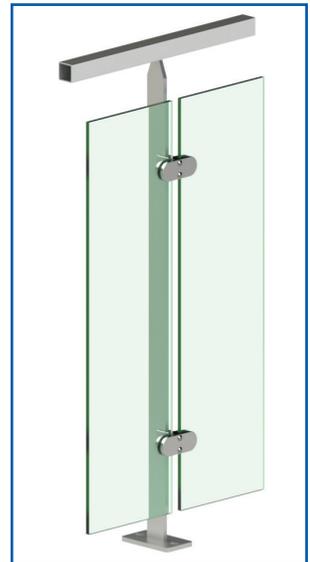



Image shows a 180° mid clamp attached to a flat post.

Handrailing

Fortitude™ Contemplation (p.586)




Images Show Assembled Posts & Post With Glass

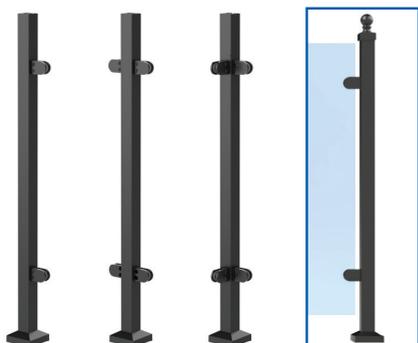

Round Glass Clamp




Post Centre To Glass

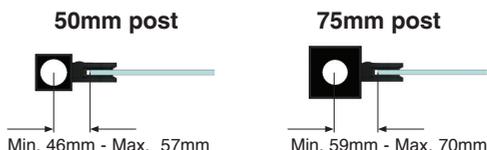

Choose your post cap from page 585.



Glass Panels (p.586)

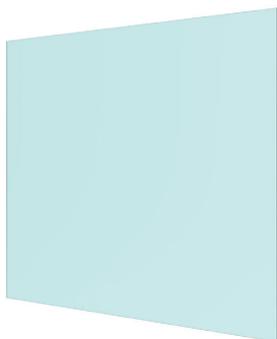

**New cheaper glass panels
in stock.**


Width mm	Code
100	1855101001024
200	1855102001024
300	1855103001024
400	1855104001024
500	1855105001024
600	1855106001024
700	1855107001024
800	1855108001024
900	1855109001024
1000	18551010001024
1100	18551011001024

1024 height x 10mm thickness to give 1100mm high handrail on a flat surface.


Largest Range Of Frameless Glass Balustrade In The UK!

- Adjustable for ease of use
- Ranges in satin anodised, PPC black & mill finish
- Suitable for residential & commercial applications
- Standard glass panels from stock
- Bespoke glass at competitive prices
- Profiles to suit glass thickness of 12 - 33mm
- A wide range of profiles & fixings available
- Tested to BS 6180


Wedge-Loc™ Slim Channel (p.472)

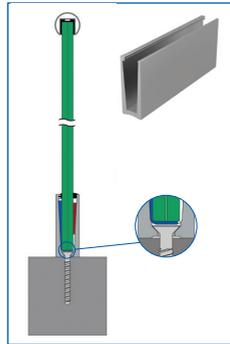


Wedge-Loc™ F Type (p.475)

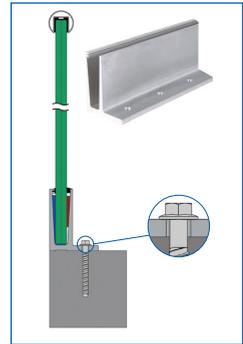


Wedge-Loc™ Duo (p.476)

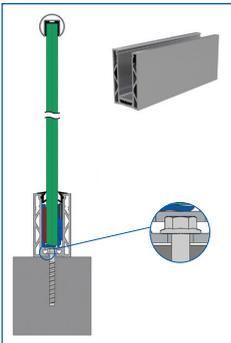


Tilt-Loc™ (p.478)

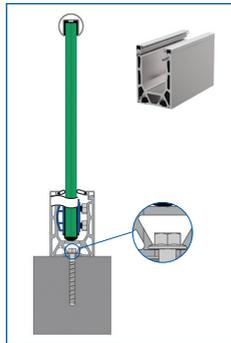


Posi-Glaze (p.480)

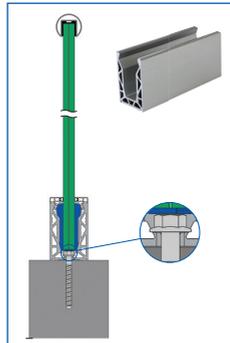


Posi-Glaze R-Lock (p.482)

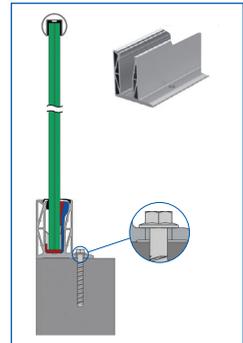


ONLEVEL - TYPE 6020 / 6021 (p.486)

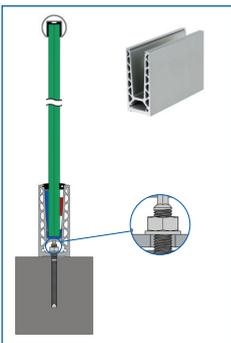


ONLEVEL - TYPE 3010 (p.488)

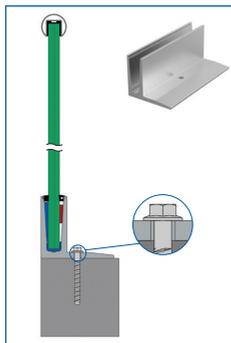

ONLEVEL - TYPE 3011 (p.489)

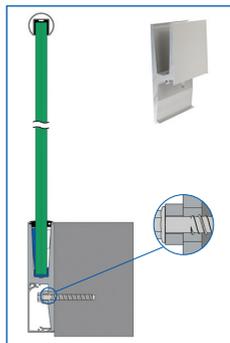

Mega-Grip 3kN (p.492)

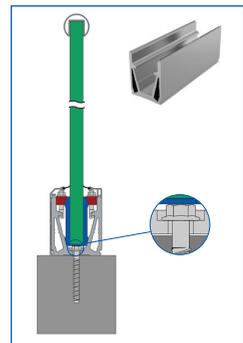

Scan here to shop now!



Fencing

Prestige Cladding (p.590)



- Available in 3 colours
- Contemporary embossed wood effect boards
- Boards are UV resistant and will not fade
- Made from eco-friendly FSC certified wood
- Boards can be installed vertically or horizontally, using our clever hidden fixing system
- Full range of trims to allow for the system to be installed on any wall.

Boards

Antique



Charcoal



Walnut



Inline Joint Trims



Cladding Edge Trims



Cladding Angle Trims



Finishing Boards



Clips & Screws Pack



- Box consists of 100 clips & 100 screws

Image shows a corner installation




Image shows enhanced woodgrain



Kingspan Fencing (p.592)



- Aluminium posts, post tops & finishing profile
- Anthracite Deep Matt RAL 7016
- Wind pressure tested to 120km/h
- Double-sided panels - smooth one side & ribbed on the other
- Low maintenance and corrosion and UV tested
- Lightweight & quick installation
- Concrete-in or bolt down option
- Robust durable coating allows panels to be used up to 1km from the coast

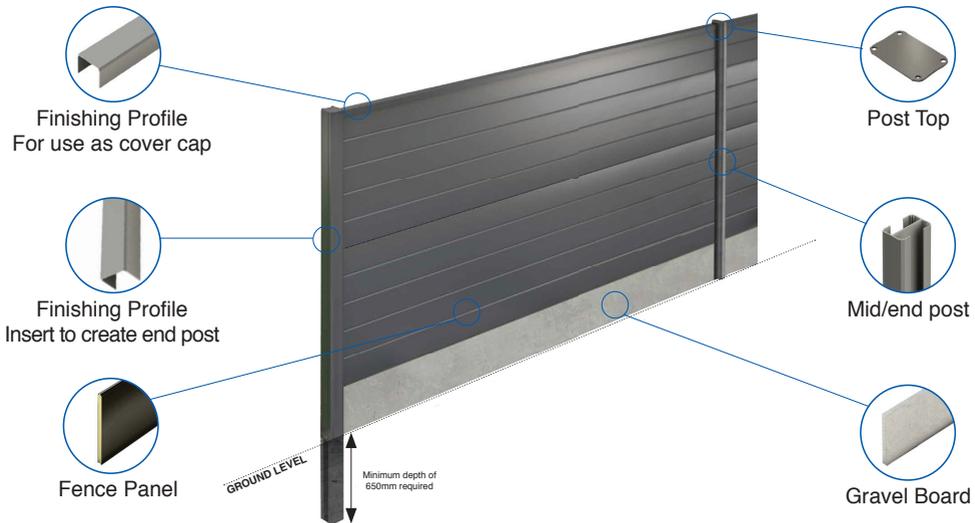

Double Sided Panel



- PUR (polyurethane) fence panels
- Two sizes:
2500 x 488 x 39mm
or 2500 x 610 x 39mm

Mid / End Post


Bolt-down or concrete-in



- Suits a 1.8m high fence
- 2750 x 100 x 65mm

Corner Post

Concrete-in



- Suits a 1.8m high fence
- 2750 x 100 x 65mm

Concrete Gravel Board



- 66kg per board
- 2500 x 300 x 35mm

Finishing Profile

For panels & end posts



Post Top



Base Plate



Fencing

Marano Integrated Aluminium Fencing (p.610)



This system can provide total privacy, mixed with contemporary laser cut screens, or full height slatted panels. Long lasting, low maintenance and lightweight. It is available in 4 contemporary colours in a matt finish. With the option of a mill finish to powder coat to your specific RAL colour.



One universal post and 4 different boards to create all these stunning designs below. The boards are discretely integrated into the posts to hide all fixings and fastenings and can be used in conjunction with each other.




Top Cap With Connect Board

Mid Post With Laser Cut Screen Insert

Mid Post With Corner Post Insert

Support Kit

Screen With Fixing Kit

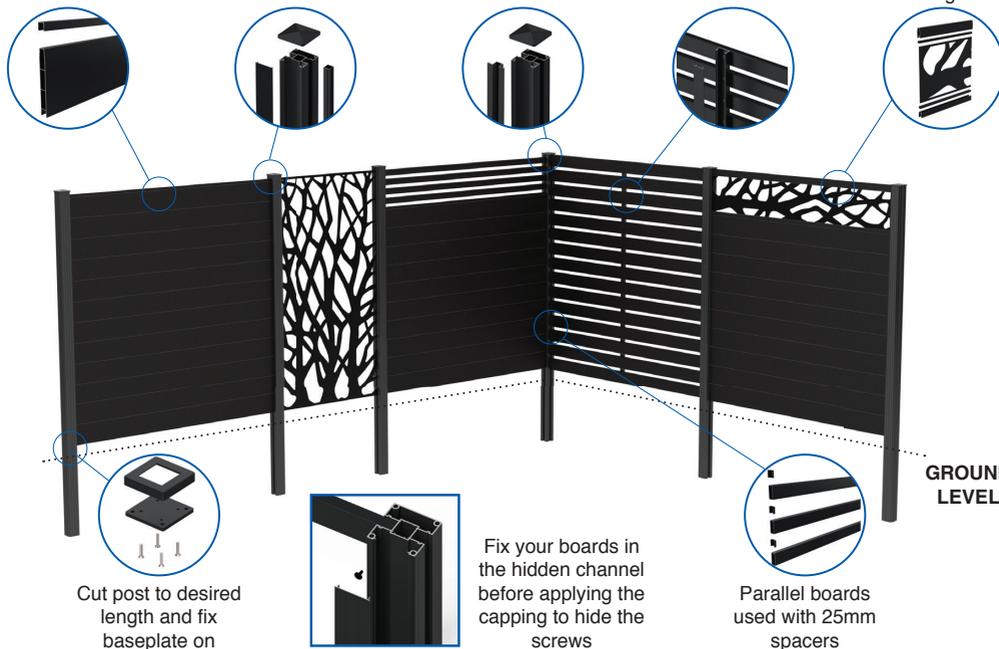

Boards

Parallel 50mm



Parallel 100mm



Half Round 55mm



Connect 150mm



All the boards are available in a choice of 4 contemporary colours in a matt finish or mill finish to allow you to powder coat to your choice of RAL colour.

Basalt Grey
RAL 7012



Pebble Grey
RAL 7032



Beige Grey
RAL 7006




Black Sand
RAL 9005



Mill Finish



Mid Post Concrete-In 1.8m
Supplied with post cap

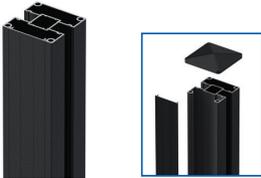

End / Corner Post Insert 2.5m



Corner Post Insert 2.5m



Screens 1825 x 300mm

Pattern 1



Pattern 2



Pattern 3



Screens 1000 x 1800mm


Pattern 1



Pattern 2



Pattern 3

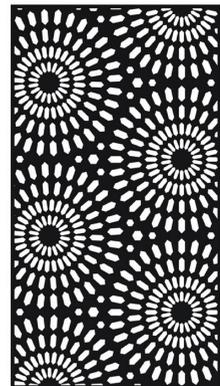


For top caps & all accessories see pages 612 & 613.

Fencing

Fortitude Estate Fencing For Long Lengths & Gates (p.624)




- Supplied self colour to naturally rust or paint after installation
- Gates can easily be reversed for either hand opening
- Gates are lockable with a padlock (Code: 51PLK50L)
- Fence height 1.2m
- Post spacing 1.0m maximum
- No welding required

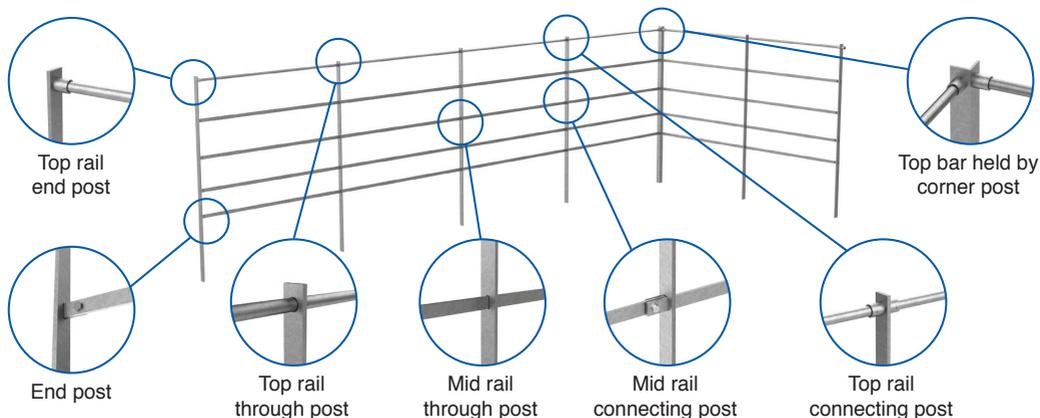

Self Colour Posts - To give 1.2m fence height

Start / End

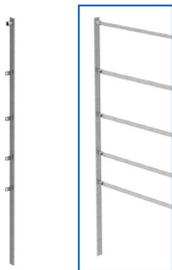


Sleeve Joint Connector



- For connecting long runs of bar/tube

Through

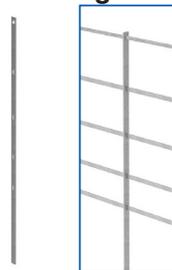


Top Rail Tube



- Ø 20 x 1.5mm
- Length: 6 - 6.1m

Connecting

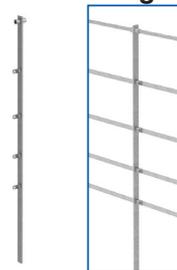


Top Rail Bar



- Ø 20mm
- Length: 6 - 6.1m

Corner

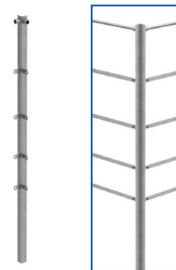


Flat Bar Rail



- Size: 25 x 6mm
- Length: 6 - 6.1m


Pedestrian Gates

With concrete-in posts



Drive Gates


With concrete-in posts

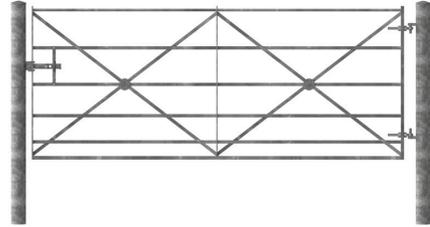

A range of fixings are available on page 625.

HERAS Temporary Fencing Components (p.649)

Mesh Fence Panel Round Top

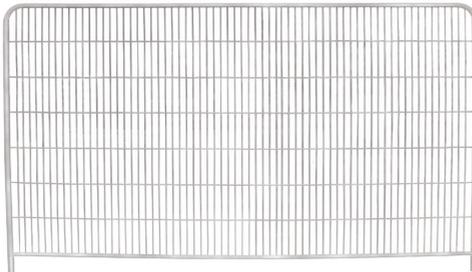

A temporary but highly effective solution to prevent unauthorized access in a wide range of applications.

- H 2000 x W 3450mm
- Horizontal tubes are Ø 25.4mm
- Mesh 262 x 43mm. Gauge 2.2mm
- Vertical tubes are Ø 38.1mm

Privacy Fence Roll (p.672)



Before use of privacy strip.



After use of privacy strip.

- Privacy for residential properties, terraces & balconies
- Protection against adverse weather
- Helps reduce unwanted noise from outside the property
- UV resistant

Green



Black



Privacy fence rolls are compatible with Nylofor 3M, Nylofor 3D XL, Nylofor 2D.

Fencing


Mesh Sliding Gates (p.670)




On site assembly.

- Requires bolting & stitch welding on site
- Available for left or right opening gates
- Galvanised & polyester powder coated green or black
- Ideal for use in car parks & commercial properties
- Other sizes available on request

Bolt-Down Track (p.670)

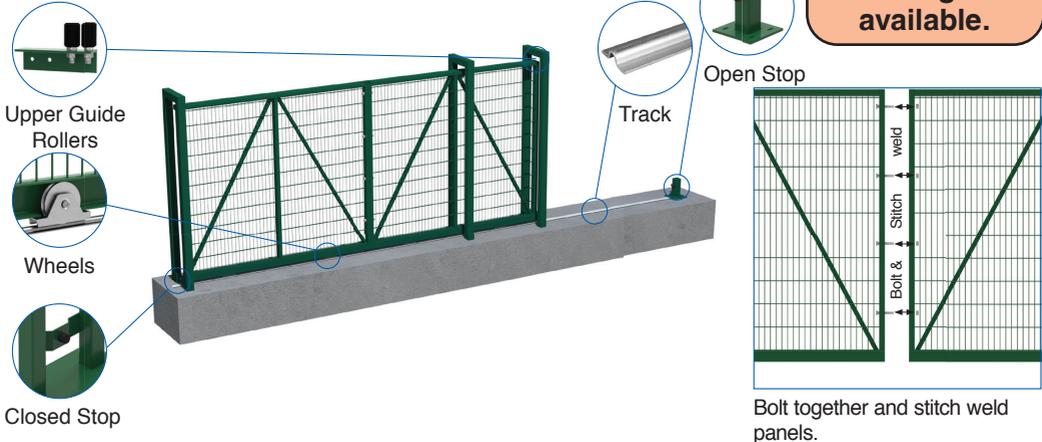

Cantilever (p.671)

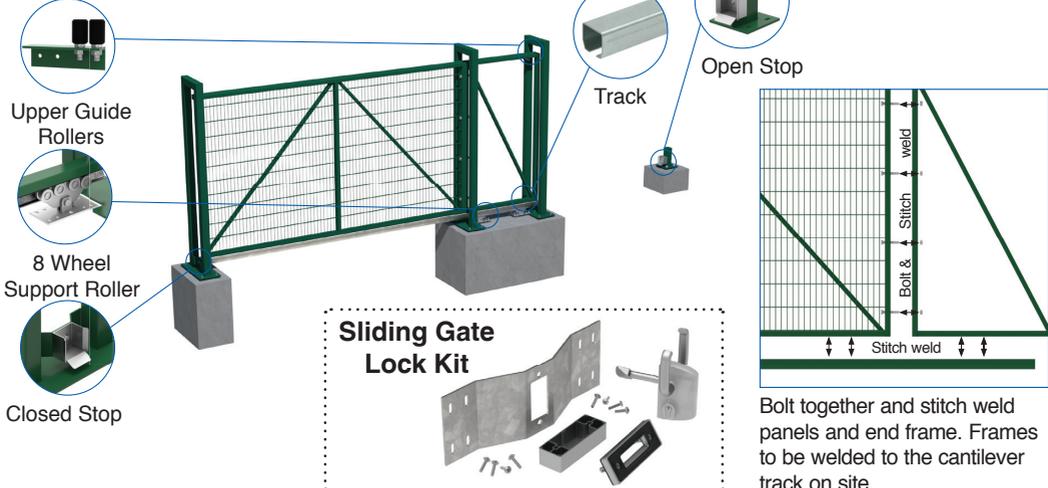


Demi Armco Crash Barrier (P.698)



- Smaller, lighter beams that still offer great site protection
- Galvanised steel - up to 30 years maintenance free life
- Protect machinery, plant & racking from vehicle impact
- Quick & easy to install

Beams

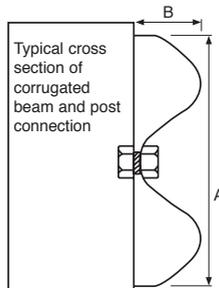

Traditional Armco crash barrier is 310mm versus our small crash barrier of 155mm

- Nominal length: 3200mm
- Overall length
- Thickness: 2.5mm
- Length of A: 155mm
- Length of B: 42mm

Posts - Bolt-Down 'Z'



- Height 560 or 760mm

Corners

External 90°

Adds 115mm



Internal 90°

Adds 115mm



Bent Corner 168°



Ends

Terminal End

Adds 134mm



Lap Bolt With Nuts & 2 Washers





F.H. BRUNDLE

SERVING THE TRADE SINCE 1889

If you would like to know more about what we do, you can view our video at www.fhbrundle.co.uk or on YouTube.



Southampton

Tel: 023 8070 3333

Fax: 023 8070 5555

southampton@brundle.com

London

Tel: 01708 25 35 45

Fax: 01708 25 35 50

sales@brundle.com

Ilkeston

Tel: 0115 930 2070

Fax: 0115 951 2455

ilkeston@brundle.com

Birmingham

Tel: 0121 565 8282

Fax: 0121 565 8292

birmingham@brundle.com

Newton-le-Willows

Tel: 01942 86 88 88

Fax: 01942 86 88 99

haydock@brundle.com

Glasgow

Tel: 0141 773 6699

Fax: 0141 773 6633

glasgow@brundle.com

September 2022

Errors and omissions excepted. Whilst every effort has been made to ensure the accuracy of the information supplied, F.H. Brundle cannot be held responsible for any errors or omissions.